
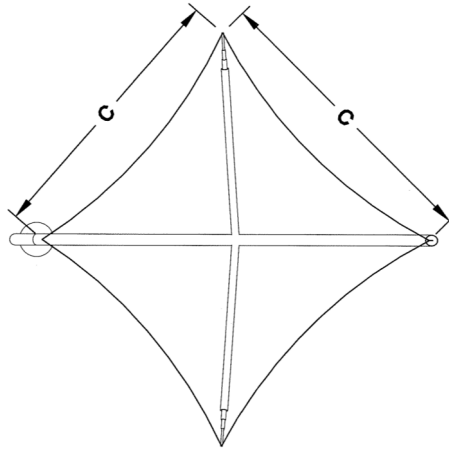


FLEXSHADE® Quad™

- Features:**
- ✘ Acrylic or Tedlar® PVC/Polyester Membrane.
 - ✘ Hot Zinc & Powder Coated Steelwork.
(Alternative Stainless Steel Support Frame)
 - ✘ Stainless Steel Cables & Fittings.
 - ✘ Minimal Footings for Area Covered.
 - ✘ Designed to AS1170 Wind Code and to comply with other Codes worldwide.

Quad™ Series


Square Module Quad™

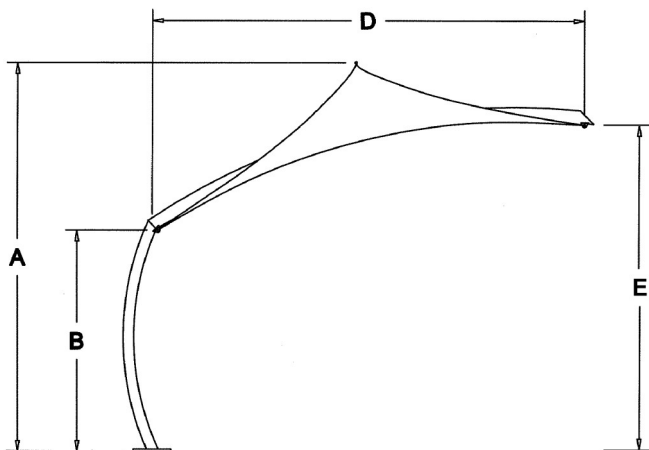

TYPE	*A	*B	*C	*D	*E	WEIGHT
Quad 'QD.2.0M'	3425	2100	2000	2830	3070	85 kG
Quad 'QD.3.0M'	3573	2100	3000	4143	3090	135 kG
Quad 'QD.4.0M'	4200	2490	4000	5560	3705	185 kG

Quad™ Links

Flexshade® Quad™ modules can be connected to provide weatherproof cover.

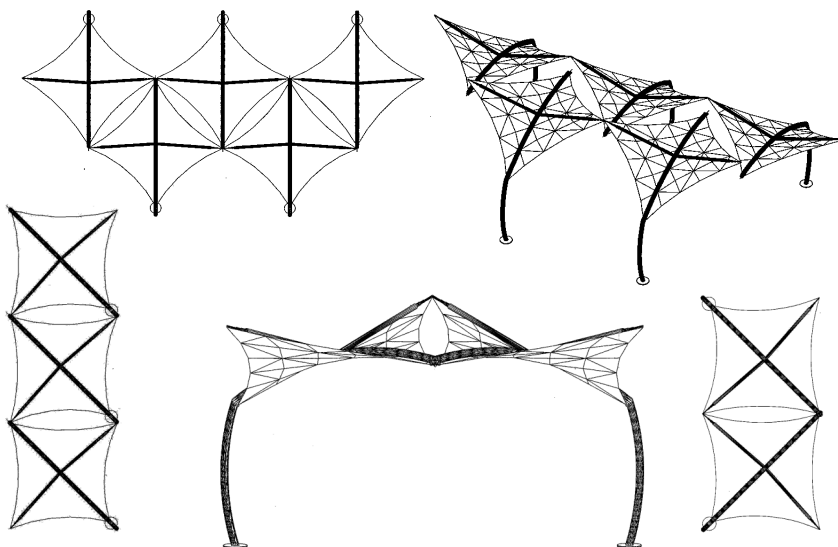

Flexshade®Quad™ can be supplied with membrane on top or below the steel.



An Activity of TENSION SPAN STRUCTURES PTY LTD ABN 20 050 400 836
62 Commercial Road, Fortitude Valley, Queensland, Australia 4006
Ph: (07) 3854 1900 Intl Ph: +61 7 3854 1900 Fax: (07) 3252 1252
Email: sales@flexshade.com Web: www.flexshade.com