



# FLEXSHADE® Quartet™

- Features:**
- ✘ Acrylic or Tedlar® PVC/Polyester Membrane.
  - ✘ Hot Zinc & Powder Coated Steelwork.  
(Alternative Stainless Steel Support Frame)
  - ✘ Stainless Steel Cables & Fittings.
  - ✘ Controlled Water Drainage Links.
  - ✘ Minimal Footings for Area Covered.
  - ✘ Designed to AS1170 Wind Code and to comply with other Codes worldwide.

## Quartet™ "S" Model

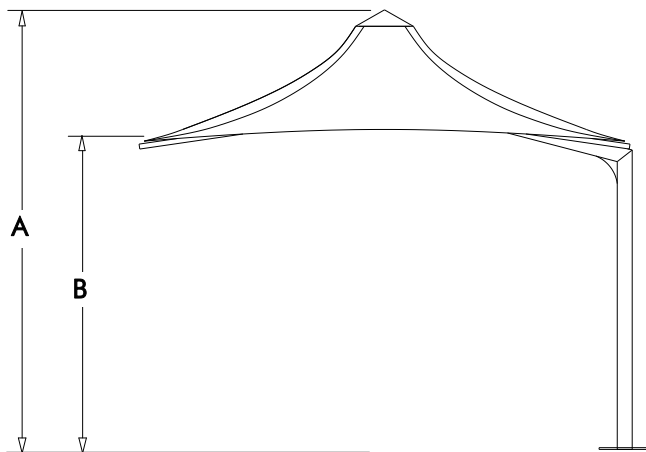

## Square Module Quartet™

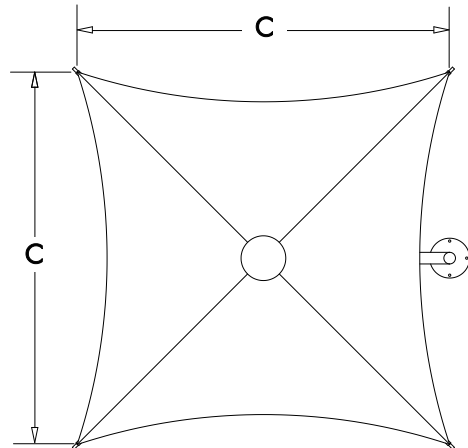

TYPE	*A	*B	*C	SHIPPING	
				DIMENSIONS	WEIGHT
Quartet *8S	3085	2400	2550	3010 x 420 x 475 mm	141 kg
Quartet *10S	3180	2400	3275	3010 x 420 x 475 mm	164 kg
Quartet *14S	3575	2400	4275	3010 x 420 x 475 mm	206 kg
Quartet *5MS	3756	2400	5000	3550 x 420 x 630 mm	303 kg

Flexshade® Quartet™ can be designed to suit specific customer requirements for height and plan dimension.





An Activity of **TENSION SPAN STRUCTURES PTY LTD** ABN 20 050 400 836  
**2 - 36 Kingtel Place, Geebung Queensland, Australia 4034**  
 Ph: (07) 3854 1900 Intl Ph: +61 7 3854 1900 Fax: (07) 3252 1252  
 Email: sales@flexshade.com Web: www.flexshade.com

# FLEXSHADE® Quartet™

- Features:**
- ✘ Acrylic or Tedlar® PVC/Polyester Membrane.
  - ✘ Hot Zinc & Powder Coated Steelwork.  
(Alternative Stainless Steel Support Frame)
  - ✘ Stainless Steel Cables & Fittings.
  - ✘ Controlled Water Drainage Links.
  - ✘ Minimal Footings for Area Covered.
  - ✘ Designed to AS1170 Wind Code and to comply with other Codes worldwide.


## Quartet™ "SP" Model

## Square Module Quartet™

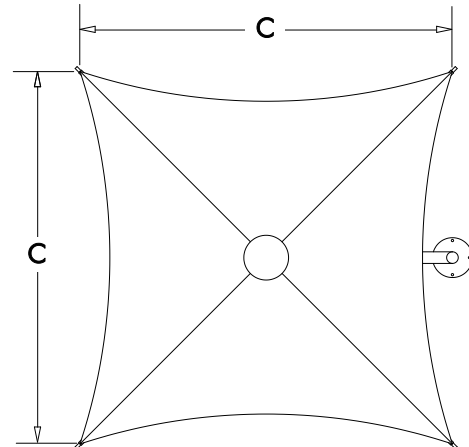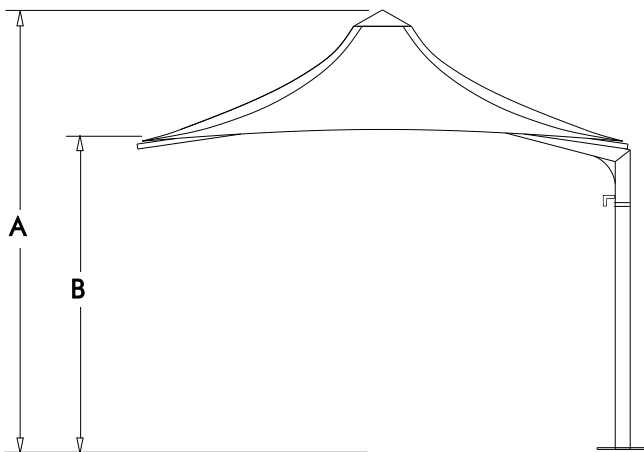

TYPE	*A	*B	*C	SHIPPING	
				DIMENSIONS	WEIGHT
Quartet *8SP	3085	2400	2550	3010 x 420 x 475 mm	141 kg
Quartet *10SP	3180	2400	3275	3010 x 420 x 475 mm	164 kg
Quartet *14SP	3575	2400	4275	3010 x 420 x 475 mm	206 kg
Quartet *5MSP	3756	2400	5000	3550 x 420 x 630 mm	303 kg

*Multiply your shade by over 250% using the Pivot Option*

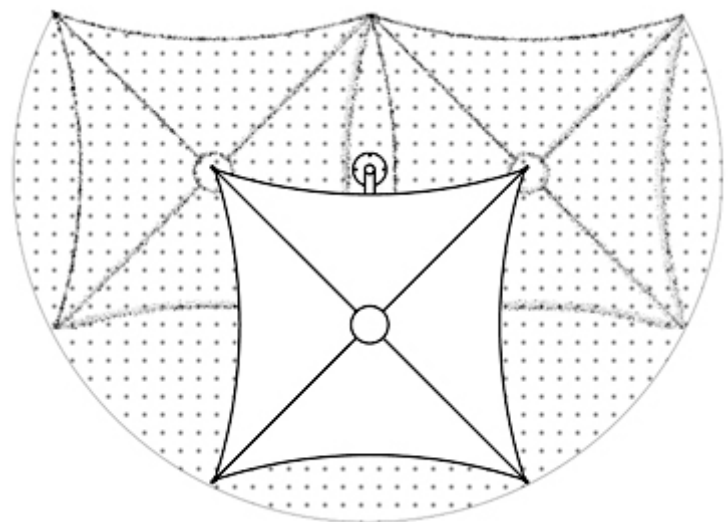

An Activity of **TENSION SPAN STRUCTURES PTY LTD** ABN 20 050 400 836  
**2 - 36 Kingtel Place, Geebung Queensland, Australia 4034**  
 Ph: (07) 3854 1900 Intl Ph: +61 7 3854 1900 Fax: (07) 3252 1252  
 Email: sales@flexshade.com Web: www.flexshade.com