
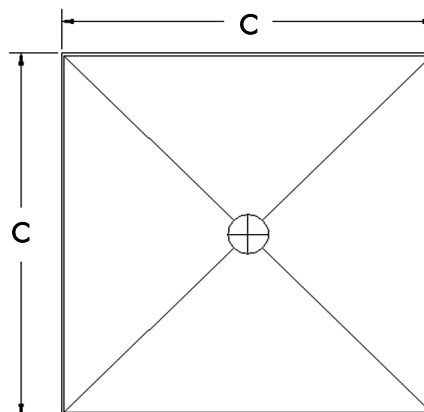


# FLEXSHADE® Quartet™

- Features:**
- ✘ Acrylic or Tedlar® PVC/Polyester Membrane.
  - ✘ Hot Zinc & Powder Coated Steelwork.  
(Alternative Stainless Steel Support Frame)
  - ✘ Stainless Steel Cables & Fittings.
  - ✘ Controlled Water Drainage Links.
  - ✘ Minimal Footings for Area Covered.
  - ✘ Designed to AS1170 Wind Code and to comply with other Codes worldwide.

## Quartet™ Curtain Series

## Square Module Quartet\**C*

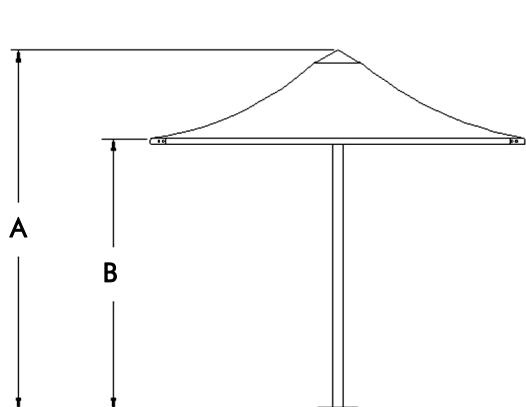


Min Edge Member Size: 50 x 50mm

TYPE	*A	*B	*C	SHIPPING	
				DIMENSIONS	WEIGHT
Quartet *8C	3085	2400	2500	2850 x 420 x 420 mm	196 kg
Quartet *10C	3180	2400	3275	3100 x 420 x 420 mm	219 kg
Quartet *14C	3575	2400	4275	3100 x 420 x 420 mm	260 kg
Quartet *5MC	3825	2400	5000	3100 x 525 x 525 mm	358 kg

## Quartet™ C - Links

Flexshade® Quartet™ C modules can be connected to provide weatherproof cover.

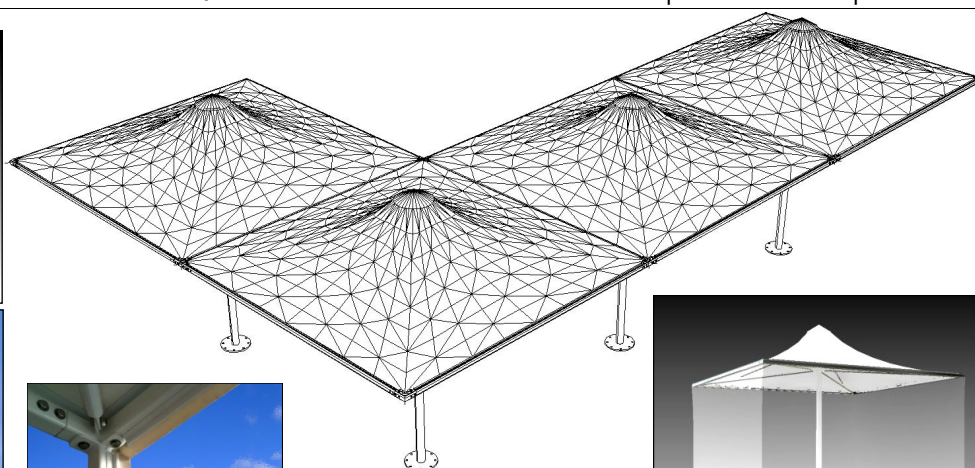

Flexshade® Quartet\**C*™ can be designed to suit specific customer requirements for height and plan dimension.



An Activity of **TENSION SPAN STRUCTURES PTY LTD** ABN 20 050 400 836  
**2 - 36 Kingtel Place Geebung Queensland, Australia 4034**  
**Ph: (07) 3854 1900 Intl Ph: +61 7 3854 1900 Fax: (07) 3252 1252**  
**Email: sales@flexshade.com Web: www.flexshade.com**



# Technical Specifications Quartet™ Range


**Q\*8C, Q\*10C, Q\*14C, Q\*5MC SQUARE**

**Wind Rating** : 45m/sec (100mph)  
Exposure B to ASCE 7-98


**Point Load** : 1kN (225lbf) at Corner

**Snow Load** : 0.95 kPa (20 psf )  
Ground Snow Load

**Plan Areas** : Q\*8C - 5.3 sq.m (57 sq.ft)  
Q\*10C- 8.9 sq.m (96 sq.ft)  
Q\*14C- 5.0 sq.m (162 sq.ft)  
Q\*5MC- 22.3 sq.m (239 sq.ft)

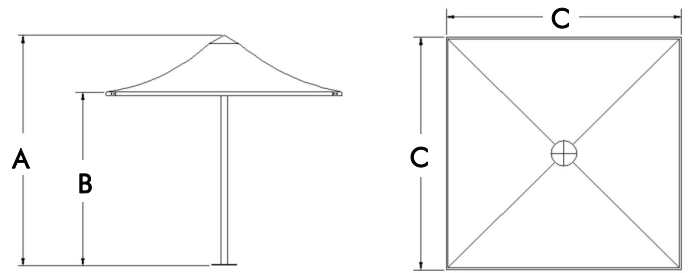

TYPE	A	B	C
Q*8C	3085 mm 10' 1"	2400 mm 7' 10"	2500 mm 8' 2"
Q*10C	3180 mm 10' 5"	2400 mm 7' 10"	3275 mm 10' 9"
Q*14C	3575 mm 11' 8"	2400 mm 7' 10"	4275 mm 14'
Q*5MC	3825 mm 12' 6"	2400 mm 7' 10"	5000 mm 16' 5"

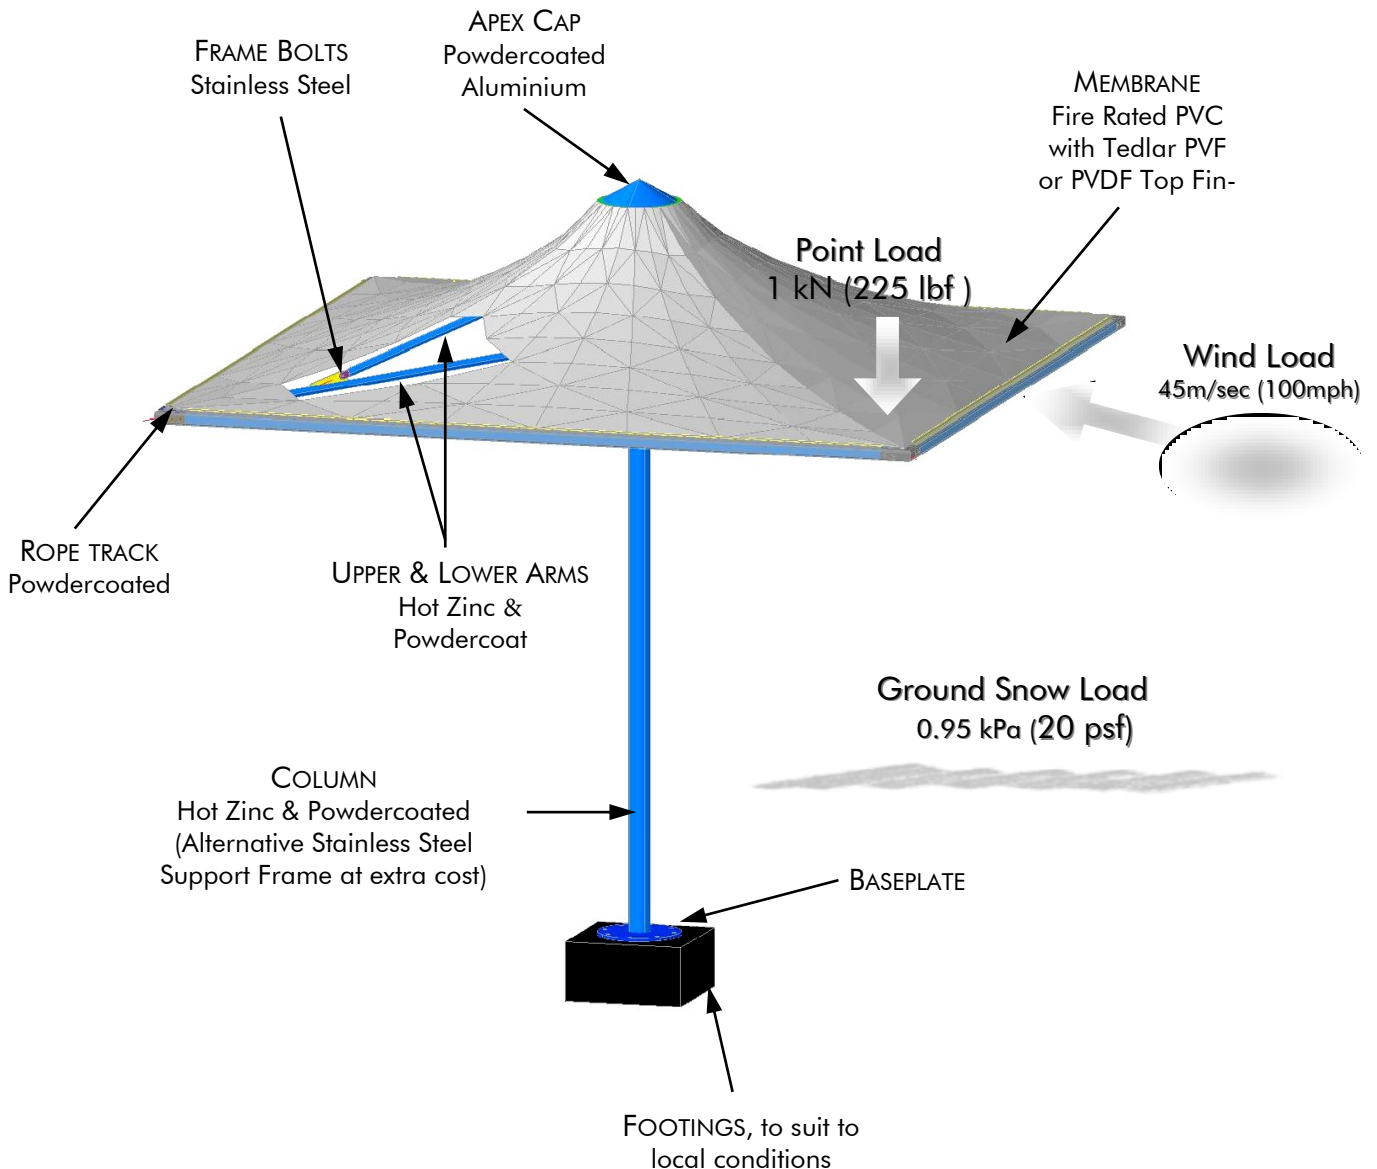

Flexshade® Quartet\*C™ can be designed to suit specific customer requirements for height and plan dimension.