


# FLEXSHADE® Tetra™


- Features:**
- ✘ Seaman Tedlar® PVC / Polyester Membrane.
  - ✘ Hot Zinc & Powder Coated Steelwork.  
(Alternative Stainless Steel Support Frame)
  - ✘ Stainless Steel Fasteners & Fittings.
  - ✘ Designed to ASCE 7-98 and AS1170 Code and to comply with other Codes worldwide for 100mph wind speed

## Tetra™ Series

*Curved Edge T\*16, T\*25*

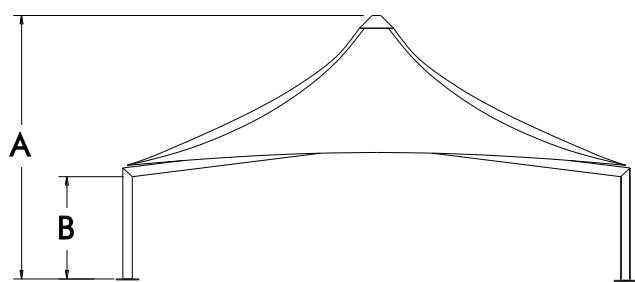

✘ T\*25 shown to Scale

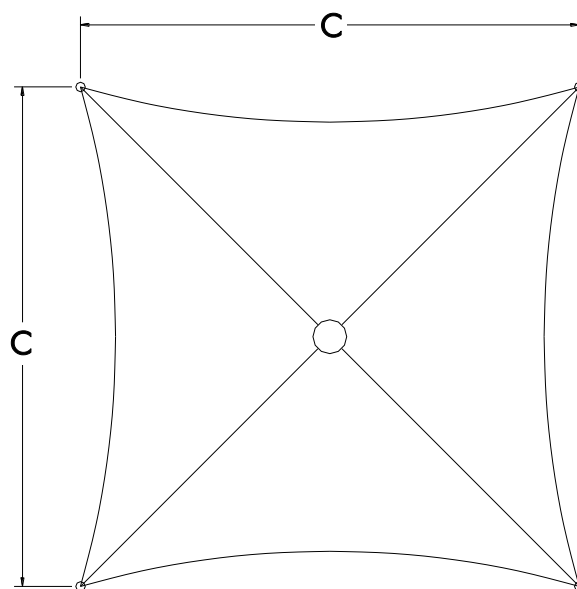

TYPE	*A	*B	*C
T*16	3994 mm 13' 1"	2400 mm 7' 10"	5000 mm 16' 5"
T*25	5175 mm 16' 11"	2500 mm 8' 2"	8815 mm 28' 11"



Flexshade® Tetra™ can be designed to suit specific customer requirements for height and plan dimension.



An Activity of **TENSION SPAN STRUCTURES PTY LTD** ABN 20 050 400 836  
**2 - 36 Kingtel Place, Geebung Queensland, Australia 4034**  
 Ph: (07) 3854 1900 Intl Ph: +61 7 3854 1900 Fax: (07) 3252 1252  
 Email: sales@flexshade.com Web: www.flexshade.com



# Technical Specifications Tetra™ Range


## TETRA CURVED EDGE- T\*16, T\*25

**Wind Rating** : 45m/sec (100mph)  
W45 to AS1170.2  
Exposure B to ASCE 7-98

**Point Load** : 1kN (225lbf) at Corner


**Snow Load** : 0.95 kPa (20 psf)  
Ground Snow Load

**Plan Areas** : T\*16 - 22 sq.m (242 sq.ft)  
T\*25 - 63 sq.m (677 sq.ft)

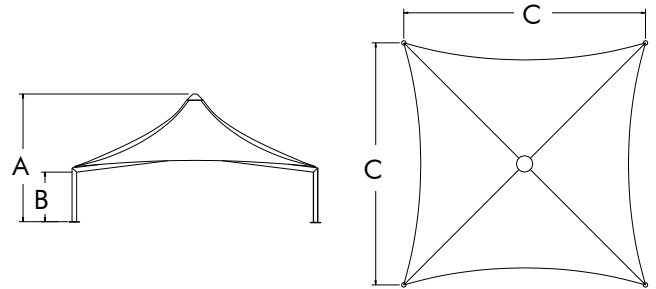

TYPE	A	B	C
T*16	3994 mm 13' 1"	2400 mm 7' 10"	5000 mm 16' 5"
T*25	5175 mm 16' 11"	2500 mm 8' 2"	8815 mm 28' 11"

※ T\*25 shown to Scale

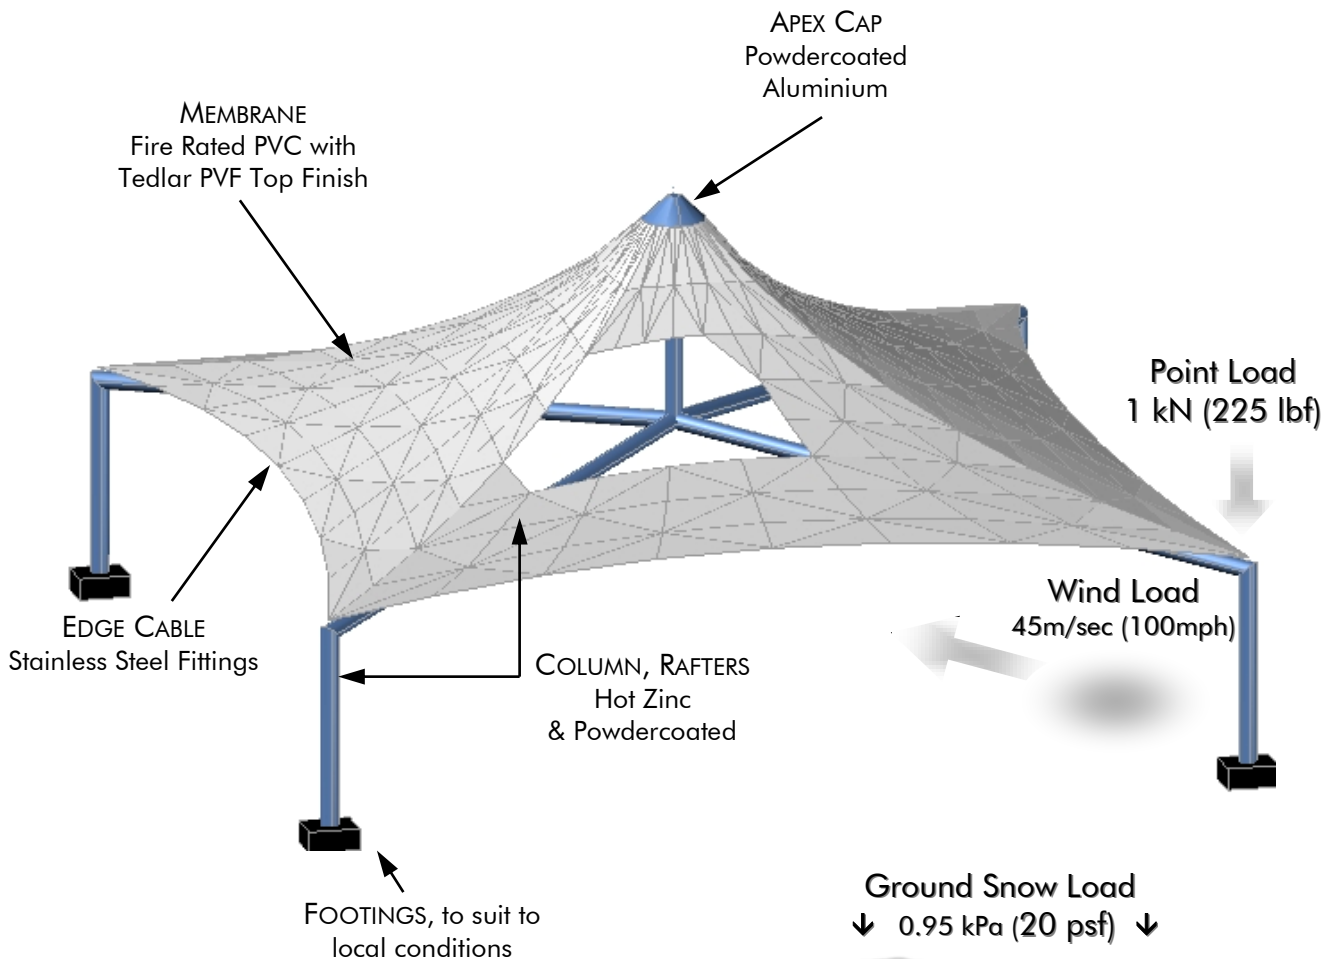

Flexshade® Tetra™ can be designed to suit specific customer requirements for height and plan dimension.