
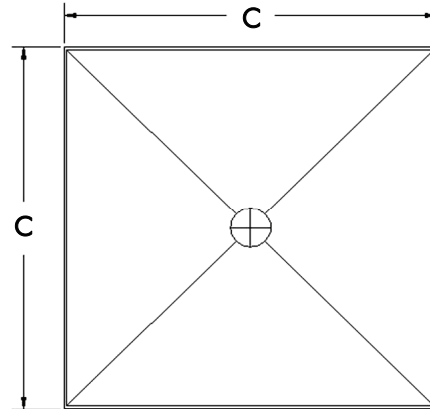


# FLEXSHADE<sup>®</sup> Quartet<sup>™</sup>

- Features:**
- Fire Rated PVC with PVDF Top Finish.
  - Hot Zinc & Powder Coated Steelwork. (Alternative Stainless Steel Support Frame)
  - Stainless Steel Cables & Fittings.
  - Minimal Footings for Area Covered.
  - Designed to ASCE7 and AS1170 Code and to comply with other Codes worldwide for 160km/hr (100mph) wind speed.

## Quartet<sup>™</sup> Curtain Series

## Square Module Quartet\**C*

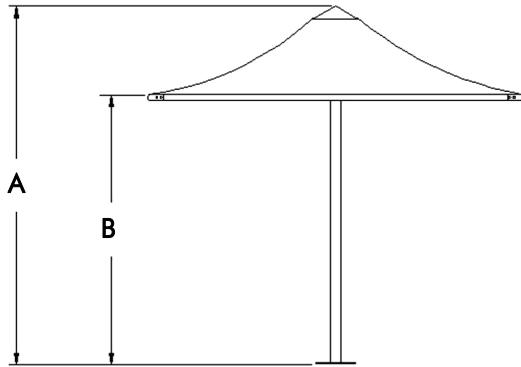


Min Edge Member Size: 50 x 50mm

### SHIPPING

TYPE	*A	*B	*C	DIMENSIONS	WEIGHT
Quartet *8C	3085	2400	2550	3010 x 420 x 475 mm	179 kg
Quartet *10C	3180	2400	3275	3280 x 420 x 475 mm	202 kg
Quartet *14C	3575	2400	4275	3010 x 420 x 475 mm	243 kg
Quartet *5MC	3825	2400	5000	3010 x 525 x 525 mm	341 kg

## Quartet<sup>™</sup> C - Links

Flexshade<sup>®</sup> Quartet<sup>™</sup> C modules can be connected to provide weatherproof cover.

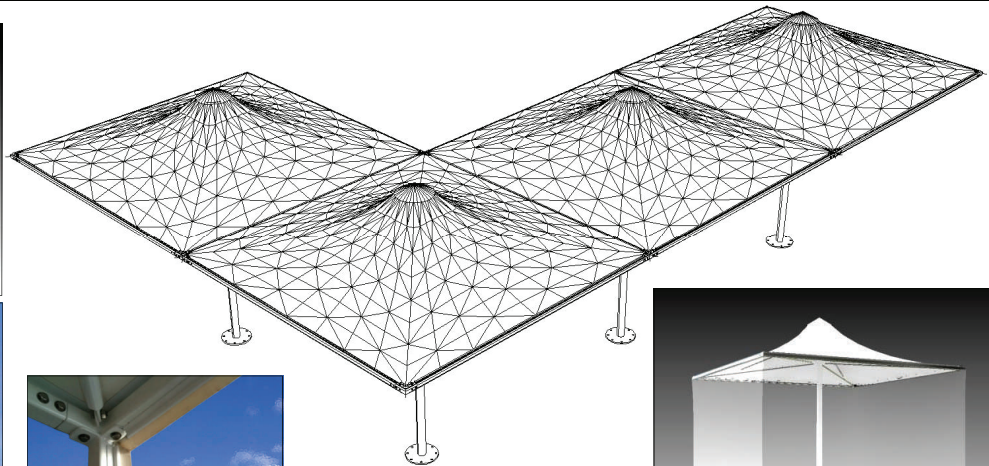

Flexshade<sup>®</sup> Quartet\**C*<sup>™</sup> can be designed to suit specific customer requirements for height and plan dimension.




An Activity of **TENSION SPAN STRUCTURES PTY LTD** ABN 20 050 400 836  
**Ph: (07) 3854 1900 Intl Ph: +61 7 3854 1900 Fax: (07) 3265 4946**  
**Email: sales@flexshade.com Web: www.flexshade.com**




# Technical Specifications Quartet™ Range

**Q\*8C, Q\*10C, Q\*14C, Q\*5MC SQUARE**

- Wind Rating** : 45m/sec (100mph)  
Exposure B to ASCE 7
- Point Load** : 1kN (225lbf) at Corner
- Snow Load** : 0.95 kPa (20 psf )  
Ground Snow Load
- Plan Areas** : Q\*8C - 6.2 sq.m (67 sq.ft)  
Q\*10C - 10.7 sq.m (115 sq.ft)  
Q\*14C - 18.3 sq.m (197 sq.ft)  
Q\*5MC - 25.0 sq.m (269 sq.ft)

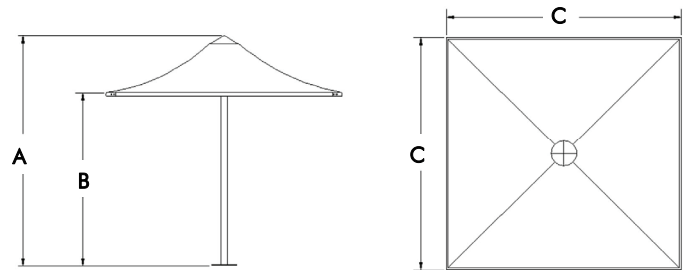

TYPE	A	B	C
Q*8C	3085 mm 10' 1"	2400 mm 7' 10"	2550 mm 8' 2"
Q*10C	3180 mm 10' 5"	2400 mm 7' 10"	3275 mm 10' 9"
Q*14C	3575 mm 11' 8"	2400 mm 7' 10"	4275 mm 14'
Q*5MC	3825 mm 12' 6"	2400 mm 7' 10"	5000 mm 16' 5"

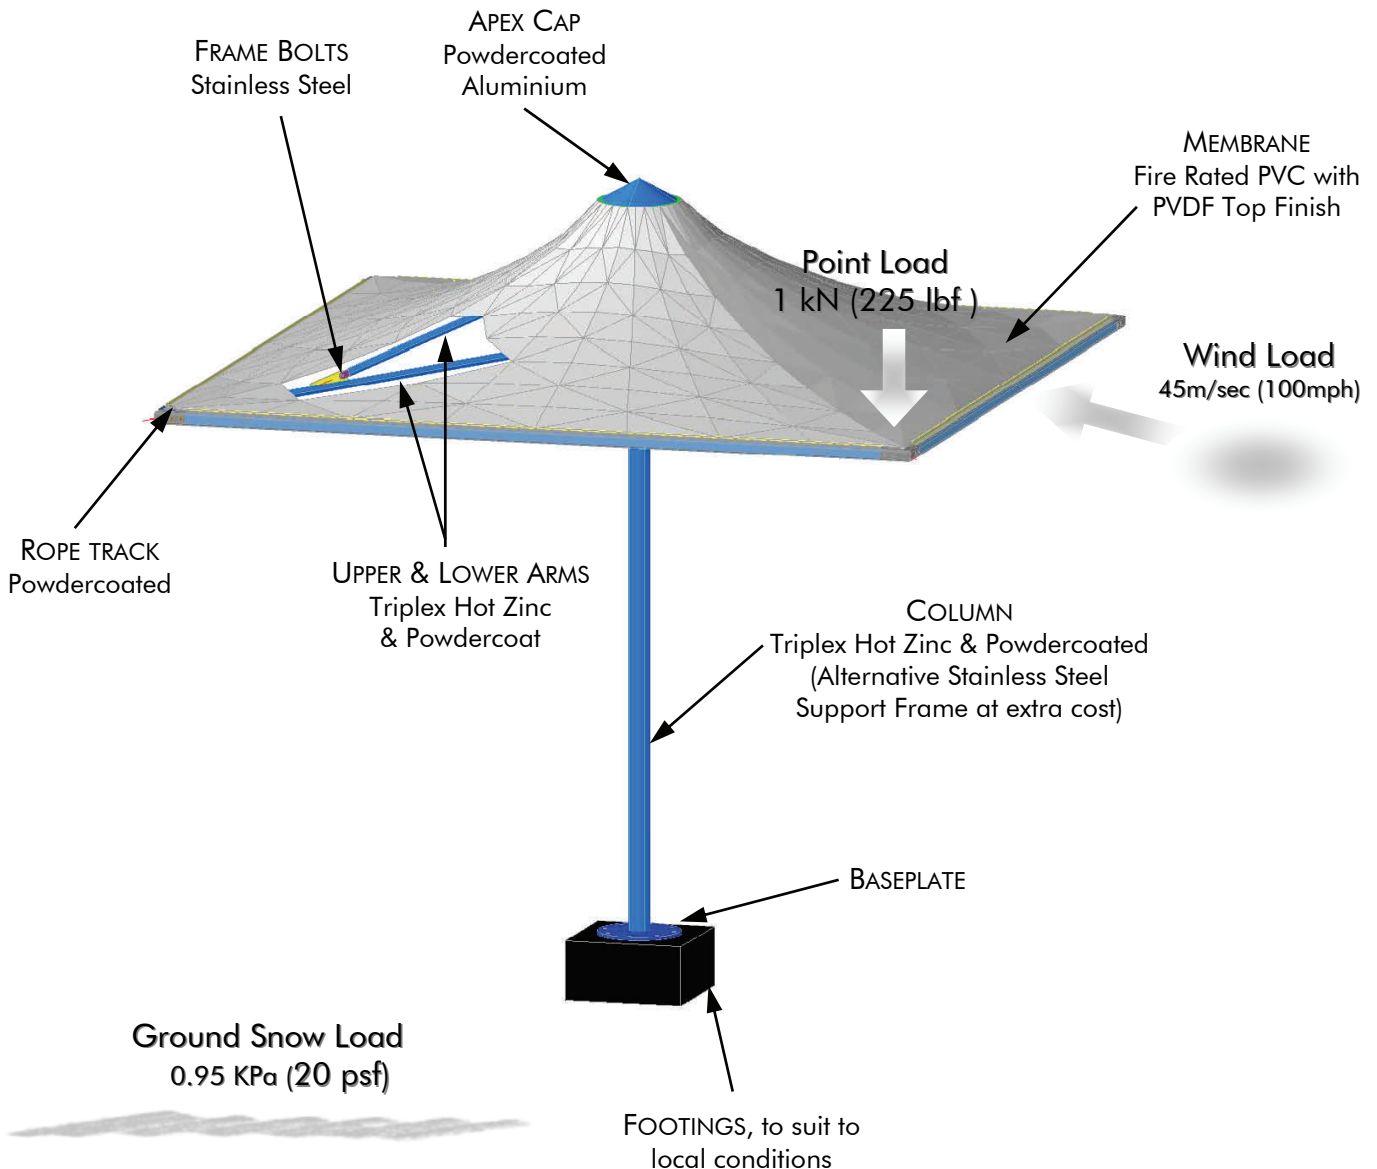

Flexshade® Quartet\**C*™ can be designed to suit specific customer requirements for height and plan dimension.