
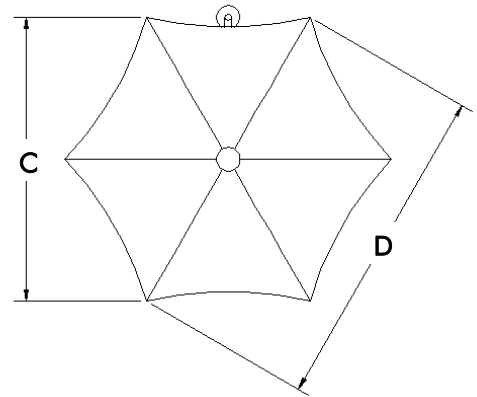


# FLEXSHADE<sup>®</sup> Hexagonal<sup>™</sup>

- Features:**
- ✘ Fire Rated PVC with PVDF Top Finish.
  - ✘ Hot Zinc & Powder Coated Steelwork. (Alternative Stainless Steel Support Frame)
  - ✘ Stainless Steel Cables & Fittings.
  - ✘ Minimal Footings for Area Covered.
  - ✘ Designed to ASCE7 and AS1170 Code and to comply with other Codes worldwide for 160km/hr (100mph) wind speed.



Hexagonal<sup>™</sup> "SP"

Cantilever<sup>™</sup> 12, 16, 19

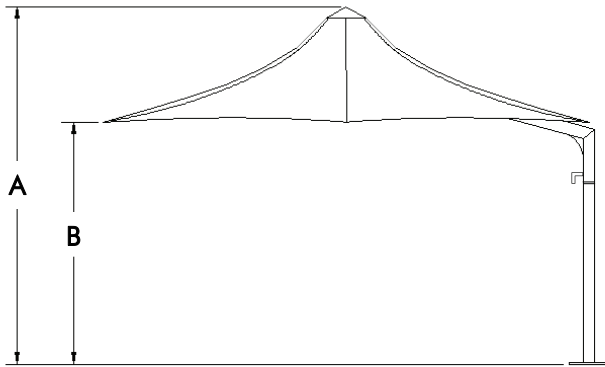

TYPE	*A	*B	*C	*D	SHIPPING	
					DIMENSIONS	WEIGHT
Flexshade *12SP	3100	2400	3120	3600	3010 x 420 x 475 mm	141 kg
Flexshade *16SP	3390	2400	4200	4850	3010 x 420 x 475 mm	188 kg
Flexshade *19SP	3665	2400	5020	5800	3010 x 420 x 475 mm	350 kg

*Multiply your shade by over 300% using the Pivot Option*

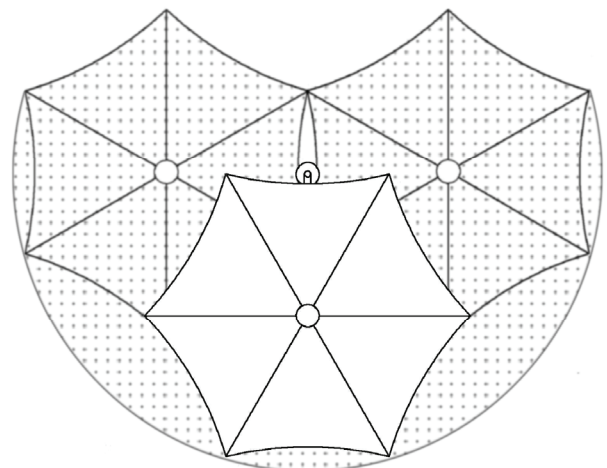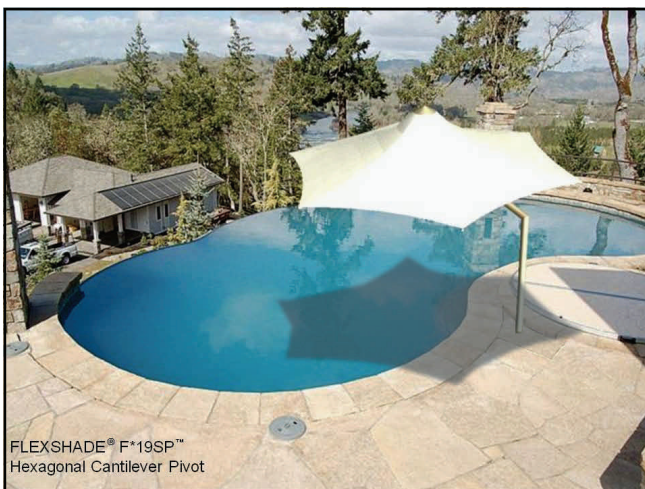

Flexshade<sup>®</sup> Hexagonal<sup>™</sup> "SP" can be designed to suit specific customer requirements for height and plan dimension.



An Activity of **TENSION SPAN STRUCTURES PTY LTD** ABN 20 050 400 836  
**Ph: (07) 3854 1900** Intl Ph: +61 7 3854 1900 **Fax: (07) 3265 4946**  
 Email: [sales@flexshade.com](mailto:sales@flexshade.com) Web: [www.flexshade.com](http://www.flexshade.com)