



# FLEXSHADE<sup>®</sup> Hypar<sup>™</sup>



- Features:**
- ✘ Fire Rated PVC with PVDF Top Finish.
  - ✘ Hot Zinc & Powder Coated Steelwork. (Alternative Stainless Steel Support Frame)
  - ✘ Stainless Steel Cables & Fittings.
  - ✘ Minimal Footings for Area Covered.
  - ✘ Designed to ASCE7 and AS1170 Code and to comply with other Codes worldwide for 160km/hr (100mph) wind speed.


## Hypar<sup>™</sup> Series

## Hexagonal Module Hypar14, 19, 25, 32

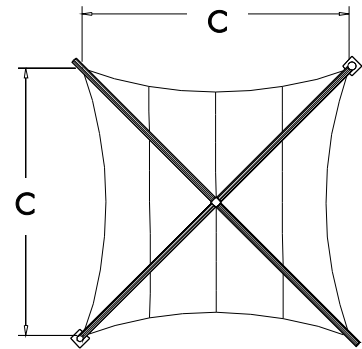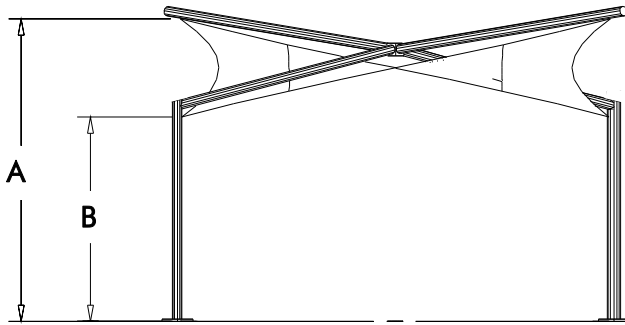

TYPE	*A	*B	*C	SHIPPING	
				DIMENSIONS	WEIGHT
Hypar *14	3128	2500	2900	3200 x 750 x 750 mm	395 kg
Hypar *19	3450	2500	4330	3500 x 750 x 750 mm	495 kg
Hypar *25	3771	2500	5760	4500 x 750 x 750 mm	660 kg
Hypar *32	4090	2500	7160	5500 x 1000 x 1000 mm	830 kg

## Hypar<sup>™</sup> Links *Flexshade<sup>®</sup> Hypar<sup>™</sup> modules can be connected to provide weatherproof cover.*

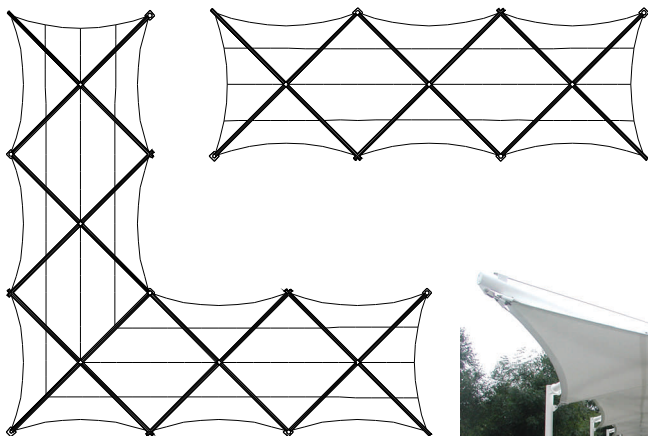

Flexshade<sup>®</sup> Hypar<sup>™</sup> can be designed to suit specific customer requirements for height and plan dimension.




An Activity of **TENSION SPAN STRUCTURES PTY LTD** ABN 20 050 400 836  
**Ph: (07) 3854 1900** Intl Ph: +61 7 3854 1900 **Fax: (07) 3265 4946**  
**Email: sales@flexshade.com** **Web: www.flexshade.com**




# Technical Specifications Hypar™ Range

<b>HYPAR - H*14, H*19, H*25, H*32</b>	
<b>Wind Rating</b>	: 45m/sec (100mph) Exposure B to ASCE 7
<b>Plan Areas</b>	: H*14 - 7 sq.m (75 sq.ft) H*19 - 16 sq.m (172 sq.ft) H*25 - 28 sq.m (301 sq.ft) H*32 - 44 sq.m (474 sq.ft)

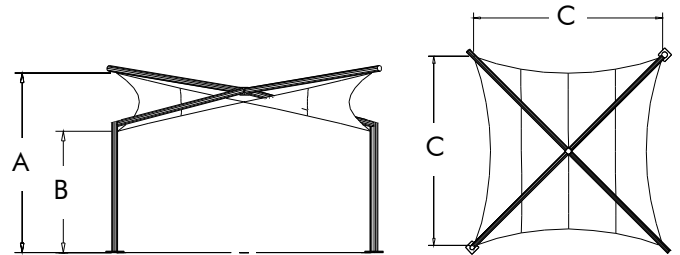

TYPE	A	B	C
H*14	3128 mm 10' 3"	2500 mm 8' 2"	2900 mm 9' 6"
H*19	3450 mm 11' 4"	2500 mm 8' 2"	4330 mm 14' 10"
H*25	3771 mm 12' 4"	2500 mm 8' 2"	5760 mm 18' 11"
H*32	4090 mm 13' 5"	2500 mm 8' 2"	7160 mm 23' 6"

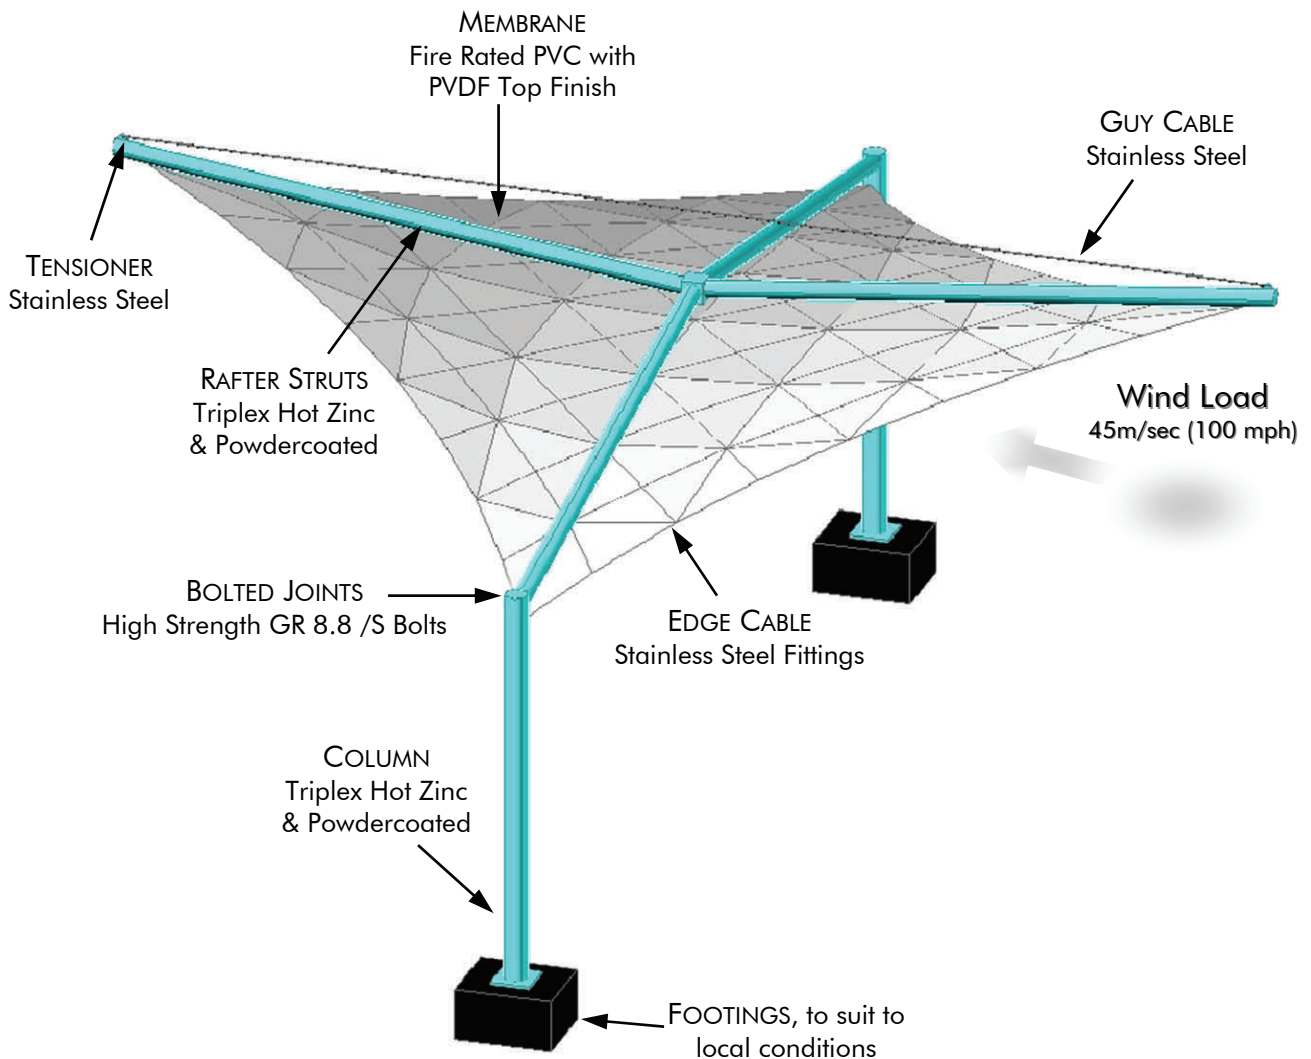

Flexshade® Hypar™ can be designed to suit specific customer requirements for height and plan dimension.