



FLEXSHADE[®] Quartet[™]

- Features:**
- Fire Rated PVC with PVDF Top Finish.
 - Hot Zinc & Powder Coated Steelwork. (Alternative Stainless Steel Support Frame)
 - Stainless Steel Cables & Fittings.
 - Minimal Footings for Area Covered.
 - Designed to ASCE7 and AS1170 Code and to comply with other Codes worldwide for 160km/hr (100mph) wind speed.

Quartet[™] "S" Model

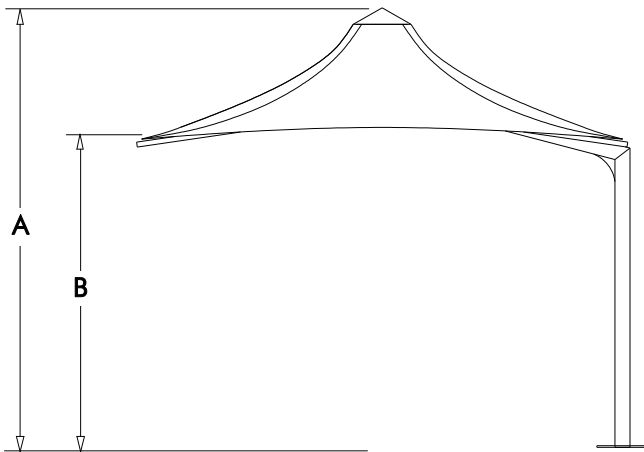

Square Module Quartet[™]

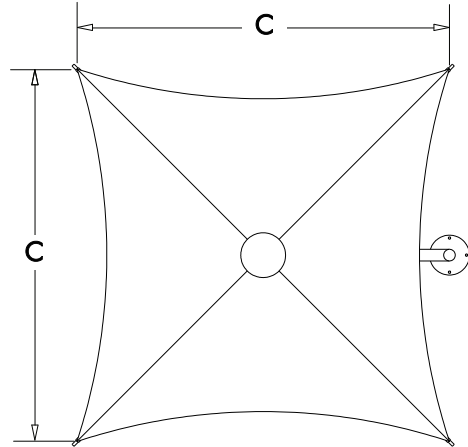

TYPE	*A	*B	*C	SHIPPING	
				DIMENSIONS	WEIGHT
Quartet *8S	3085	2400	2550	3010 x 420 x 475 mm	124 kg
Quartet *10S	3180	2400	3275	3010 x 420 x 475 mm	147 kg
Quartet *14S	3575	2400	4275	3010 x 420 x 475 mm	189 kg
Quartet *5MS	3756	2400	5000	3550 x 420 x 475 mm	286 kg
Quartet *6MS	4045	2400	6000	4125 x 420 x 475 mm	453 kg

Flexshade[®] Quartet[™] can be designed to suit specific customer requirements for height and plan dimension.




An Activity of **TENSION SPAN STRUCTURES PTY LTD** ABN 20 050 400 836
Ph: (07) 3854 1900 Int'l Ph: +61 7 3854 1900 Fax: (07) 3265 4946
Email: sales@flexshade.com Web: www.flexshade.com




Technical Specifications Quartet™ Range

Q*8S, Q*10S, Q*14S, Q*5MS, Q*6MS SQUARE

- Wind Rating** : 45m/sec (100mph)
Exposure B to ASCE 7
- Point Load** : 1kN (225lbf) at Corner
- Snow Load** : 0.95 kPa (20 psf)
Ground Snow Load
- Plan Areas** : Q*8S - 5.3 sq.m (57 sq.ft)
Q*10S - 8.9 sq.m (96 sq.ft)
Q*14S - 15.0 sq.m (162 sq.ft)
Q*5MS - 22.3 sq.m (239 sq.ft)
Q*6MS - 32.1 sq.m (345 sq.ft)

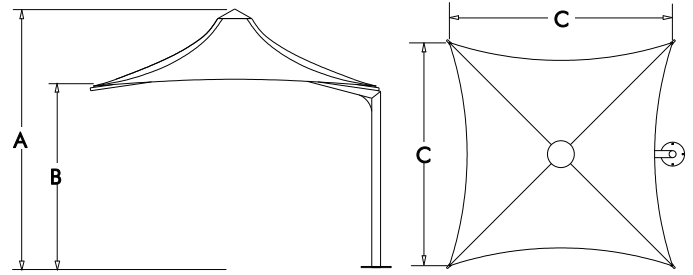

TYPE	A	B	C
Q*8S	3085 mm 10' 1"	2400 mm 7' 10"	2550 mm 8' 2"
Q*10S	3180 mm 10' 5"	2400 mm 7' 10"	3275 mm 10' 9"
Q*14S	3575 mm 11' 8"	2400 mm 7' 10"	4275 mm 14'
Q*5MS	3756 mm 12' 4"	2400 mm 7' 10"	5000 mm 16' 5"
Q*6MS	4054 mm 13' 3"	2400 mm 7' 10"	6000 mm 19' 8"

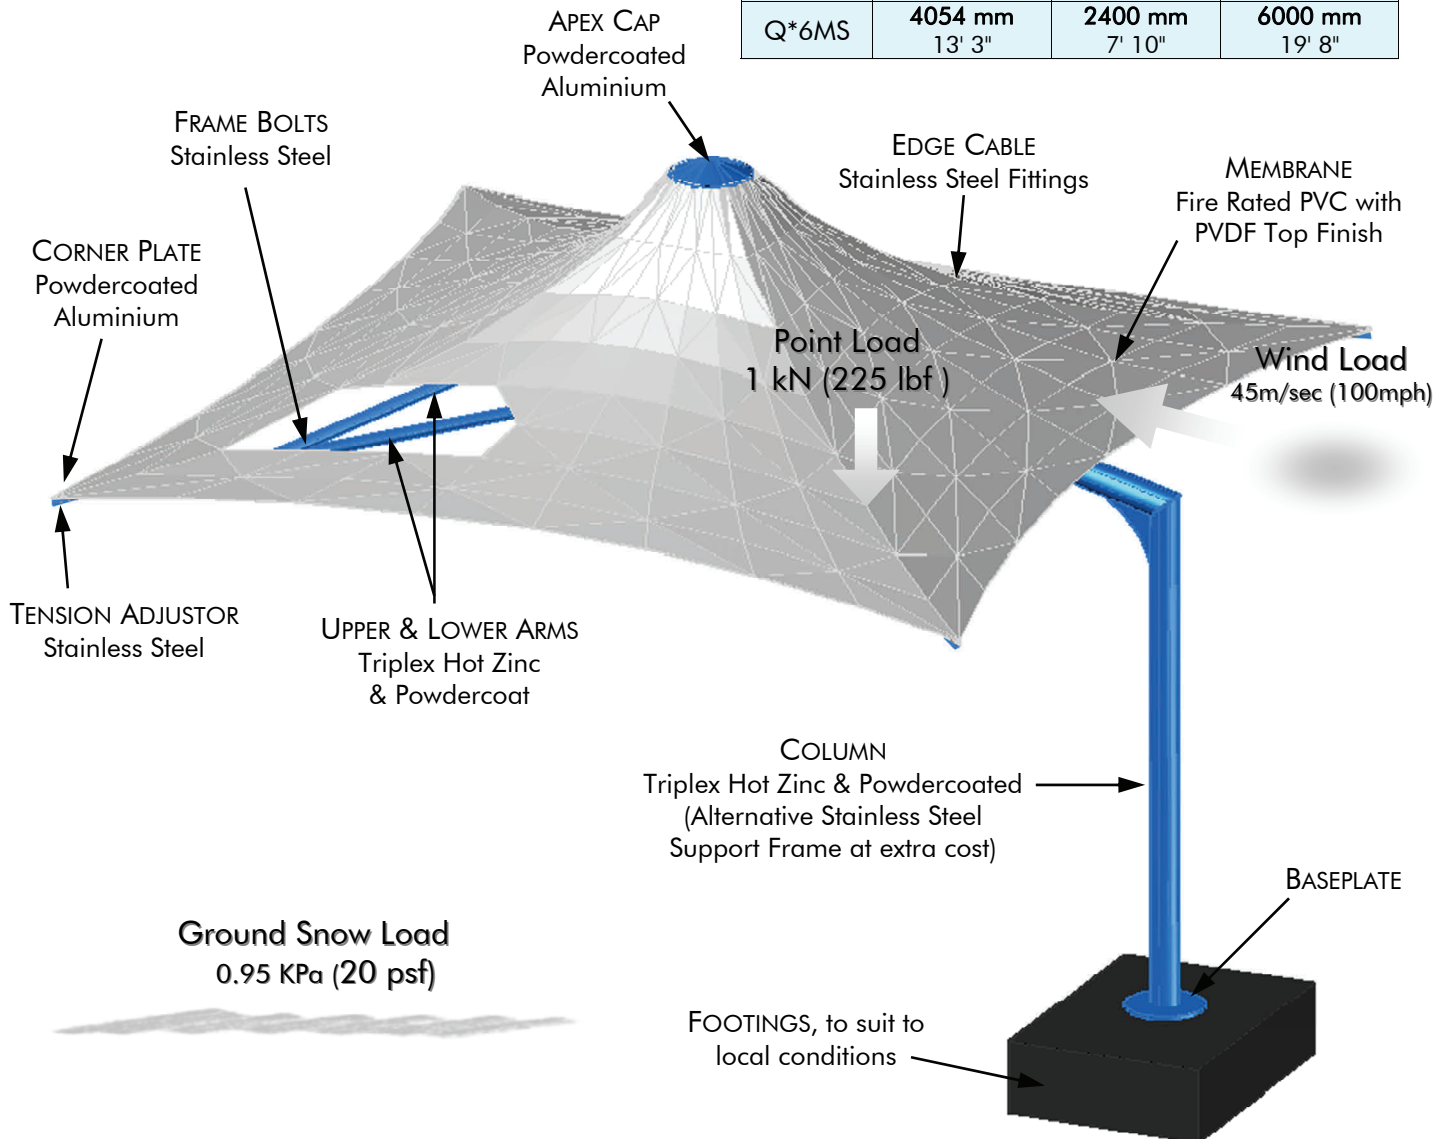

Flexshade® Quartet™ can be designed to suit specific customer requirements for height and plan dimension.