



FLEXSHADE[®] Quartet[™]

- Features:**
- Fire Rated PVC with PVDF Top Finish.
 - Hot Zinc & Powder Coated Steelwork. (Alternative Stainless Steel Support Frame)
 - Stainless Steel Cables & Fittings.
 - Minimal Footings for Area Covered.
 - Designed to ASCE7 and AS1170 Code and to comply with other Codes worldwide for 160km/hr (100mph) wind speed.

Quartet[™] "SP" Model

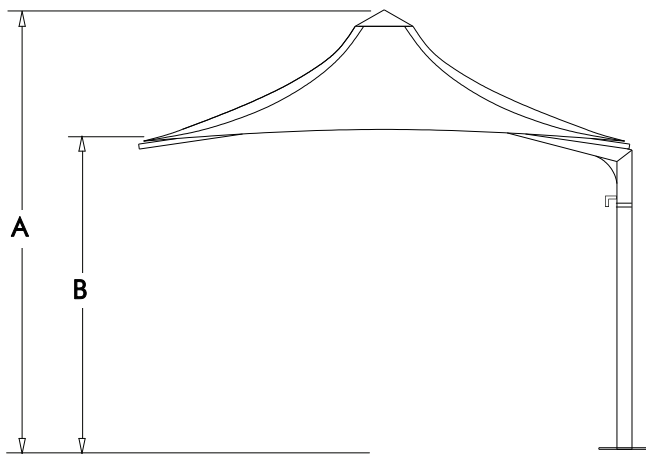


Square Module Quartet[™]

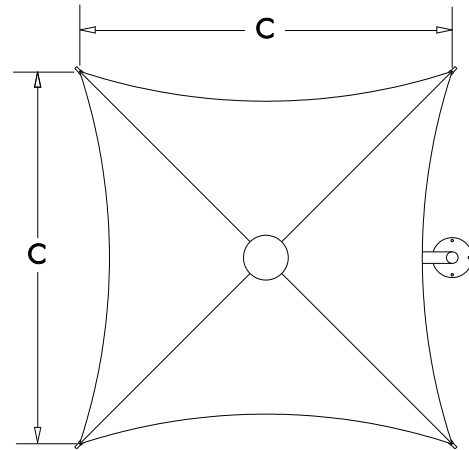

TYPE	*A	*B	*C	SHIPPING	
				DIMENSIONS	WEIGHT
Quartet *8SP	3085	2400	2550	3010 x 420 x 475 mm	124 kg
Quartet *10SP	3180	2400	3275	3010 x 420 x 475 mm	147 kg
Quartet *14SP	3575	2400	4275	3010 x 420 x 475 mm	189 kg
Quartet *5MSP	3756	2400	5000	3550 x 420 x 475 mm	286 kg

Multiply your shade by over 250% using the Pivot Option

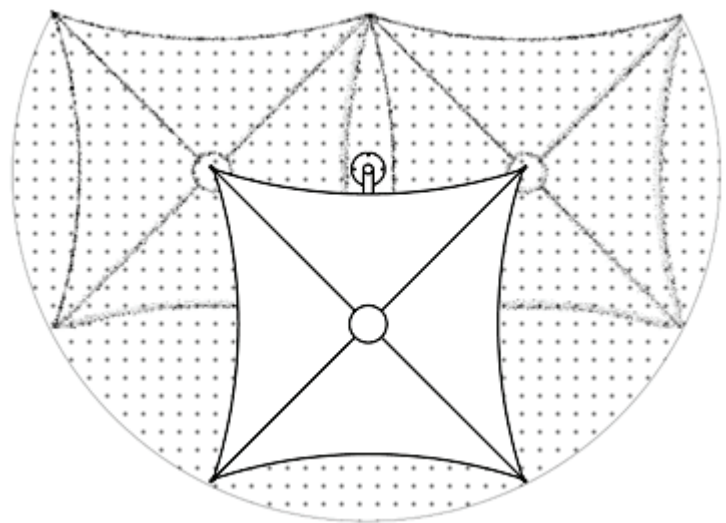

An Activity of **TENSION SPAN STRUCTURES PTY LTD** ABN 20 050 400 836
Ph: (07) 3854 1900 Intl Ph: +61 7 3854 1900 Fax: (07) 3265 4946
Email: sales@flexshade.com Web: www.flexshade.com