
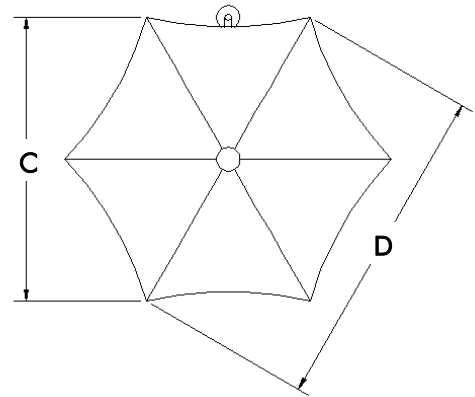


FLEXSHADE® Hexagonal™

- Features:**
- Fire Rated PVC with PVDF Top Finish.
 - Zinc & Powder Coated Steelwork.
 - Stainless Steel Cables & Fittings.
 - Minimal Footings for Area Covered.
 - Designed to ASCE7 and AS1170 Code and to comply with other Codes worldwide for 160km/hr (100mph) wind speed.
- # Standard specifications may change without notice.



Hexagonal™ "SP"

Cantilever™ 12, 16, 19

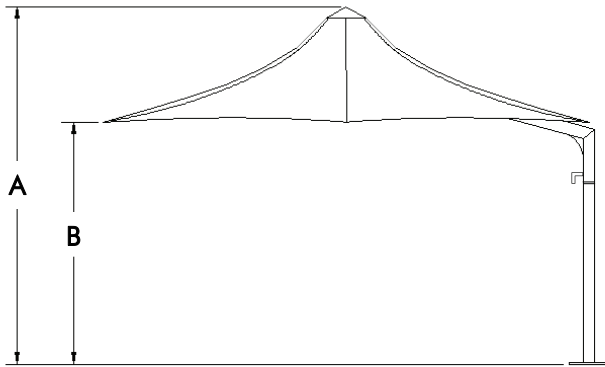

TYPE	*A	*B	*C	*D	SHIPPING	
					DIMENSIONS	WEIGHT
Flexshade *12SP	3100	2400	3120	3600	3010 x 420 x 475 mm	141 kg
Flexshade *16SP	3390	2400	4200	4850	3010 x 420 x 475 mm	188 kg
Flexshade *19SP	3665	2400	5020	5800	3010 x 420 x 475 mm	350 kg

Multiply your shade by over 300% using the Pivot Option

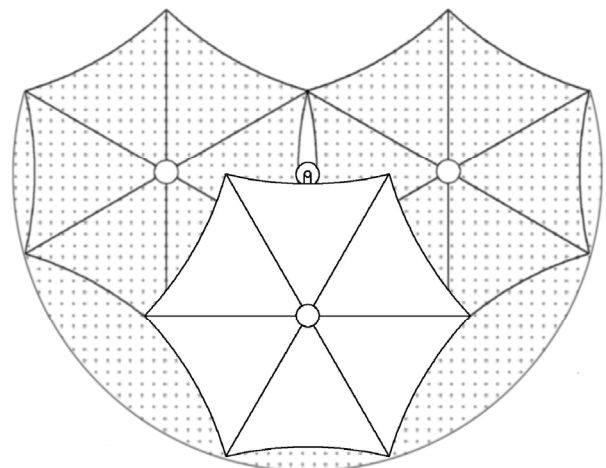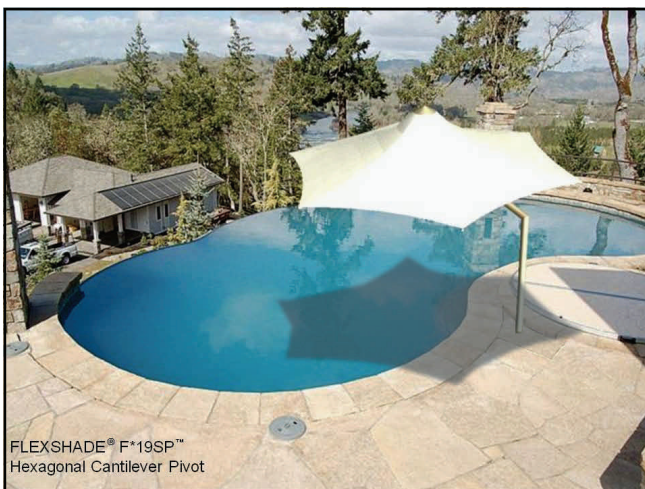

Flexshade® Hexagonal™ "SP" can be designed to suit specific customer requirements for height and plan dimension.



An Activity of **TENSION SPAN STRUCTURES PTY LTD** ABN 20 050 400 836
Ph: (07) 3854 1900 Int'l Ph: +61 7 3854 1900 Fax: (07) 3265 4946
Email: sales@flexshade.com Web: www.flexshade.com