


# FLEXSHADE®

# Hexagonal™


- Features:**
- ✘ Acrylic or Tedlar® PVC/Polyester Membrane.
  - ✘ Hot Zinc & Powder Coated Steelwork. (Alternative Stainless Steel Support Frame)
  - ✘ Stainless Steel Cables & Fittings.
  - ✘ Controlled Water Drainage Links.
  - ✘ Minimal Footings for Area Covered.
  - ✘ Designed to AS1170 Wind Code and to comply with other Codes worldwide.

Hexagonal™ Series

Hexagonal Module™ 12, 16, 19

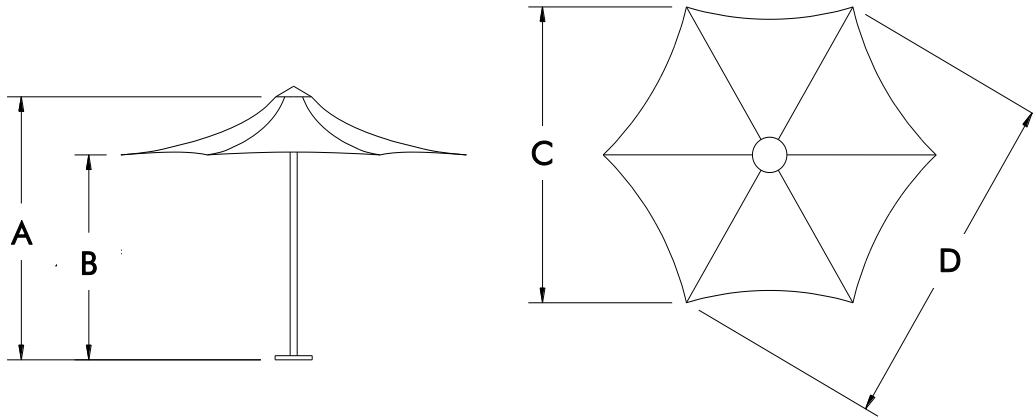

TYPE	*A	*B	*C	*D	SHIPPING	
					DIMENSIONS	WEIGHT
Flexshade *12	2760	2100	3124	3606	3010 x 420 x 475 mm	140 kg
Flexshade *16	3065	2100	4218	4870	3010 x 420 x 475 mm	182 kg
Flexshade *19	3505	2250	5022	5800	3010 x 420 x 475 mm	325 kg

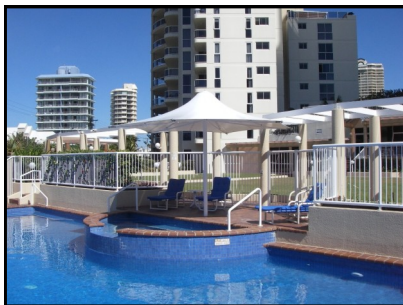

Flexshade® Hexagonal™ can be designed to suit specific customer requirements for height and plan dimension.




An Activity of **TENSION SPAN STRUCTURES PTY LTD** ABN 20 050 400 836  
**2 - 36 Kingtel Place Geebung Queensland, Australia 4034**  
 Ph: (07) 3854 1900 Intl Ph: +61 7 3854 1900 Fax: (07) 3252 1252  
 Email: sales@flexshade.com Web: www.flexshade.com




# Technical Specifications Hexagon™ Range

HEXAGONAL™ - F*12, F*16, F*19	
<b>Wind Rating</b>	: 45m/sec (100mph) W45 to AS1170.2 Exposure B to ASCE 7-98
<b>Point Load</b>	: 1 kN (225lbf) at Corner
<b>Snow Load</b>	: 1.43 kPa (30 psf) Ground Snow Load
<b>Plan Areas</b>	: F*12 - 7.8 sq.m (84 sq.ft) F*16 - 14 sq.m (150 sq.ft) F*19 - 19 sq.m (205 sq.ft)

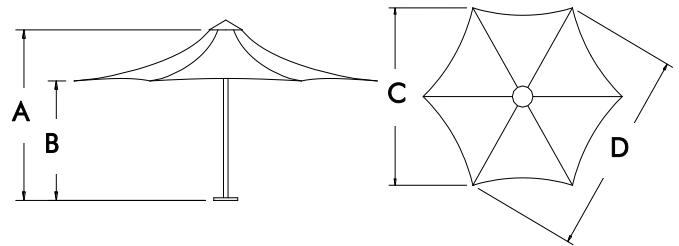

TYPE	A	B	C	D
F*12	2760 mm 9'	2100 mm 6' 10"	3124 mm 10' 3"	3606 mm 11' 10"
F*16	3065 mm 10'	2100 mm 6' 10"	4218 mm 13' 10"	4870 mm 15' 11"
F*19	3505 mm 11' 6"	2250 mm 7' 4"	5022 mm 16' 5"	5800 mm 19'

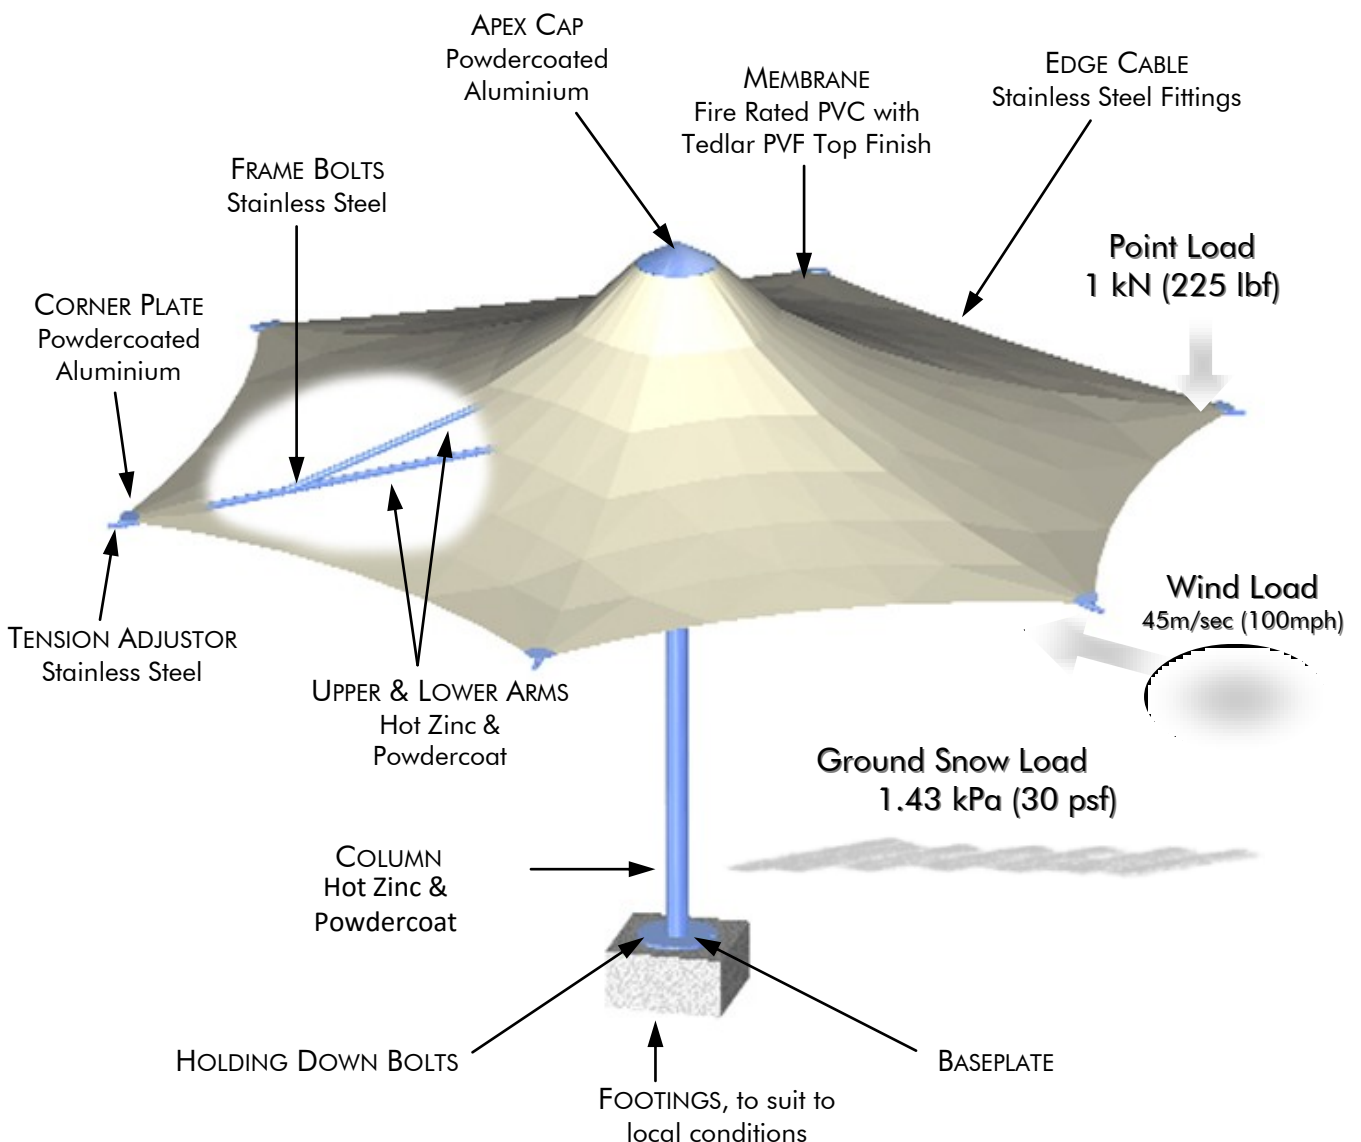

Flexshade® can be designed to suit specific customer requirements for height and plan dimension.