
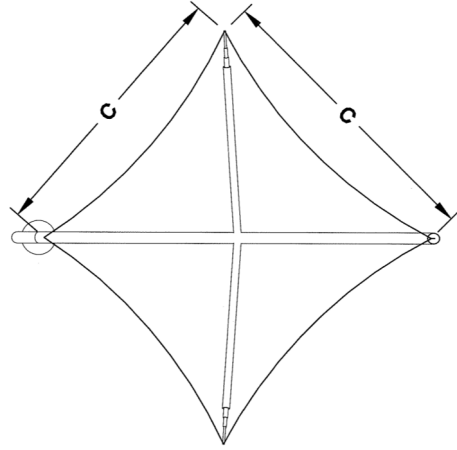


# FLEXSHADE® Quad™

- Features:**
- ✘ Acrylic or Tedlar® PVC/Polyester Membrane.
  - ✘ Hot Zinc & Powder Coated Steelwork.  
(Alternative Stainless Steel Support Frame)
  - ✘ Stainless Steel Cables & Fittings.
  - ✘ Minimal Footings for Area Covered.
  - ✘ Designed to AS1170 Wind Code and to comply with other Codes worldwide.

## Quad™ Series


## Square Module Quad™

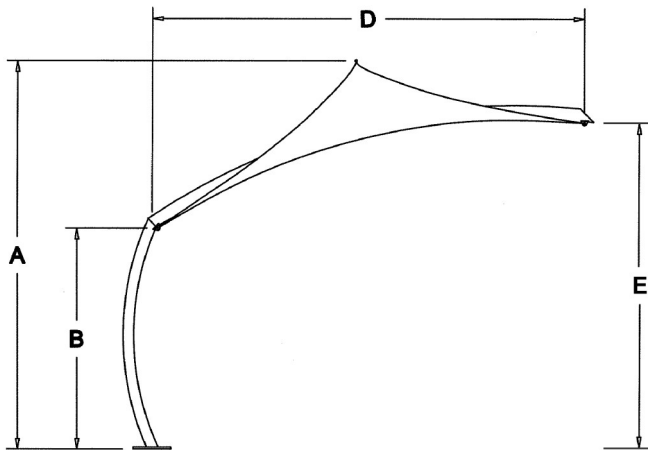

TYPE	*A	*B	*C	*D	*E	WEIGHT
Quad 'QD.2.0M'	3425	2100	2000	2830	3070	85 kG
Quad 'QD.3.0M'	3573	2100	3000	4143	3090	135 kG
Quad 'QD.4.0M'	4200	2490	4000	5560	3705	185 kG

## Quad™ Links

Flexshade® Quad™ modules can be connected to provide weatherproof cover.

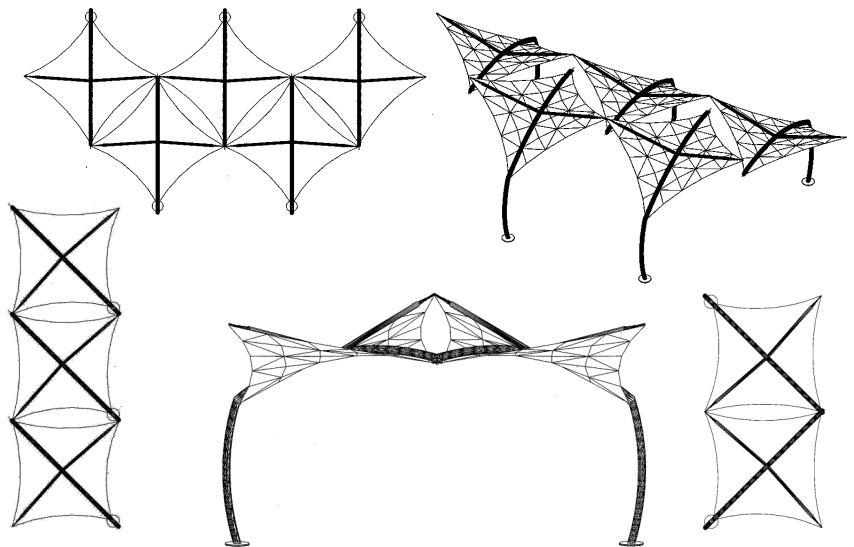

Flexshade®Quad™ can be supplied with membrane on top or below the steel.



An Activity of **TENSION SPAN STRUCTURES PTY LTD** ABN 20 050 400 836  
**2 - 36 Kingtel Place Geebung Queensland, Australia 4034**  
**Ph: (07) 3854 1900 Intl Ph: +61 7 3854 1900 Fax: (07) 3252 1252**  
**Email: sales@flexshade.com Web: www.flexshade.com**