
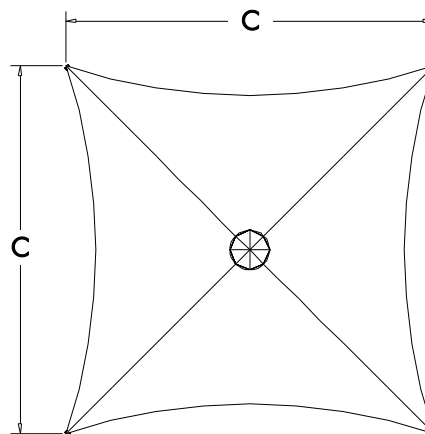


# FLEXSHADE® Quartet™

- Features:**
- ✘ Acrylic or Tedlar® PVC/Polyester Membrane.
  - ✘ Hot Zinc & Powder Coated Steelwork. (Alternative Stainless Steel Support Frame)
  - ✘ Stainless Steel Cables & Fittings.
  - ✘ Controlled Water Drainage Links.
  - ✘ Minimal Footings for Area Covered.
  - ✘ Designed to AS1170 Wind Code and to comply with other Codes worldwide.

## Quartet™ Series

## Square Module Quartet



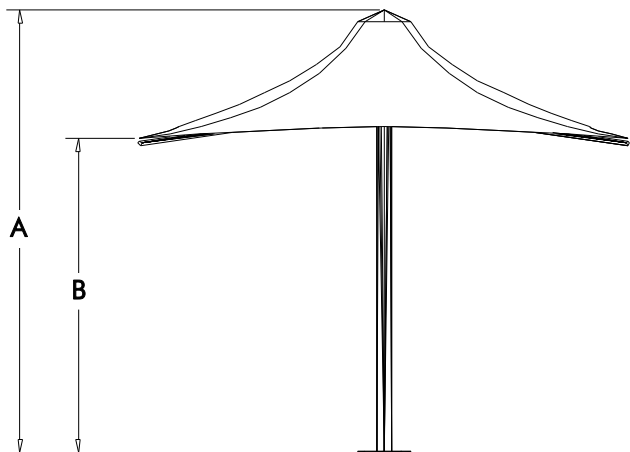


### SHIPPING

TYPE	*A	*B	*C	DIMENSIONS	WEIGHT
Quartet *8	2785	2100	2550	3010 x 420 x 475 mm	125 kg
Quartet *10	2865	2100	3275	3010 x 420 x 475 mm	145 kg
Quartet *14	3275	2100	4275	3010 x 420 x 475 mm	182 kg
Quartet *5M	3615	2250	5000	3010 x 420 x 475 mm	268 kg

## Quartet™ Links

Flexshade® Quartet™ modules can be connected to provide weatherproof cover.

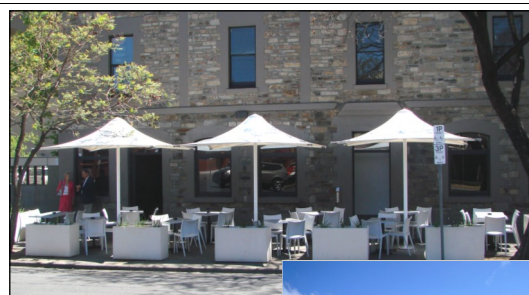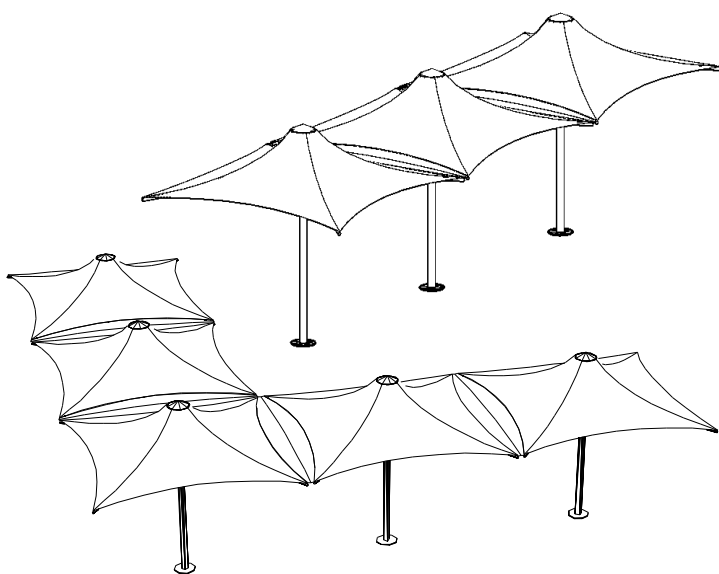

Flexshade® Quartet™ can be designed to suit specific customer requirements for height and plan dimension.



An Activity of **TENSION SPAN STRUCTURES PTY LTD** ABN 20 050 400 836  
**2 - 36 Kingtel Place Geebung Queensland, Australia 4034**  
**Ph: (07) 3854 1900 Intl Ph: +61 7 3854 1900 Fax: (07) 3252 1252**  
**Email: sales@flexshade.com Web: www.flexshade.com**



# Technical Specifications Quartet™ Range


## Q\*8, Q\*10, Q\*14, Q\*5M SQUARE

**Wind Rating** : 45m/sec (100mph)  
Exposure B to ASCE 7-98


**Point Load** : 1kN (225lbf) at Corner

**Snow Load** : 0.95 kPa (20 psf )  
Ground Snow Load

**Plan Areas** : Q\*8 - 5.3 sq.m (57 sq.ft)  
Q\*10 - 8.9 sq.m (96 sq.ft)  
Q\*14 - 15.0 sq.m (162 sq.ft)  
Q\*5M - 22.3 sq.m (239 sq.ft)

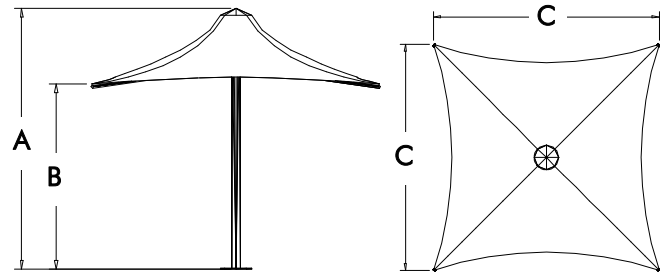

TYPE	A	B	C
Q*8	2785 mm 9' 2"	2100 mm 6' 11"	2500 mm 8' 2"
Q*10	2865 mm 9' 5"	2100 mm 6' 11"	3275 mm 10' 9"
Q*14	3275 mm 10' 9"	2100 mm 6' 11"	4275 mm 14'
Q*5M	3615 mm 11' 10"	2250 mm 7' 5"	5000 mm 16' 5"

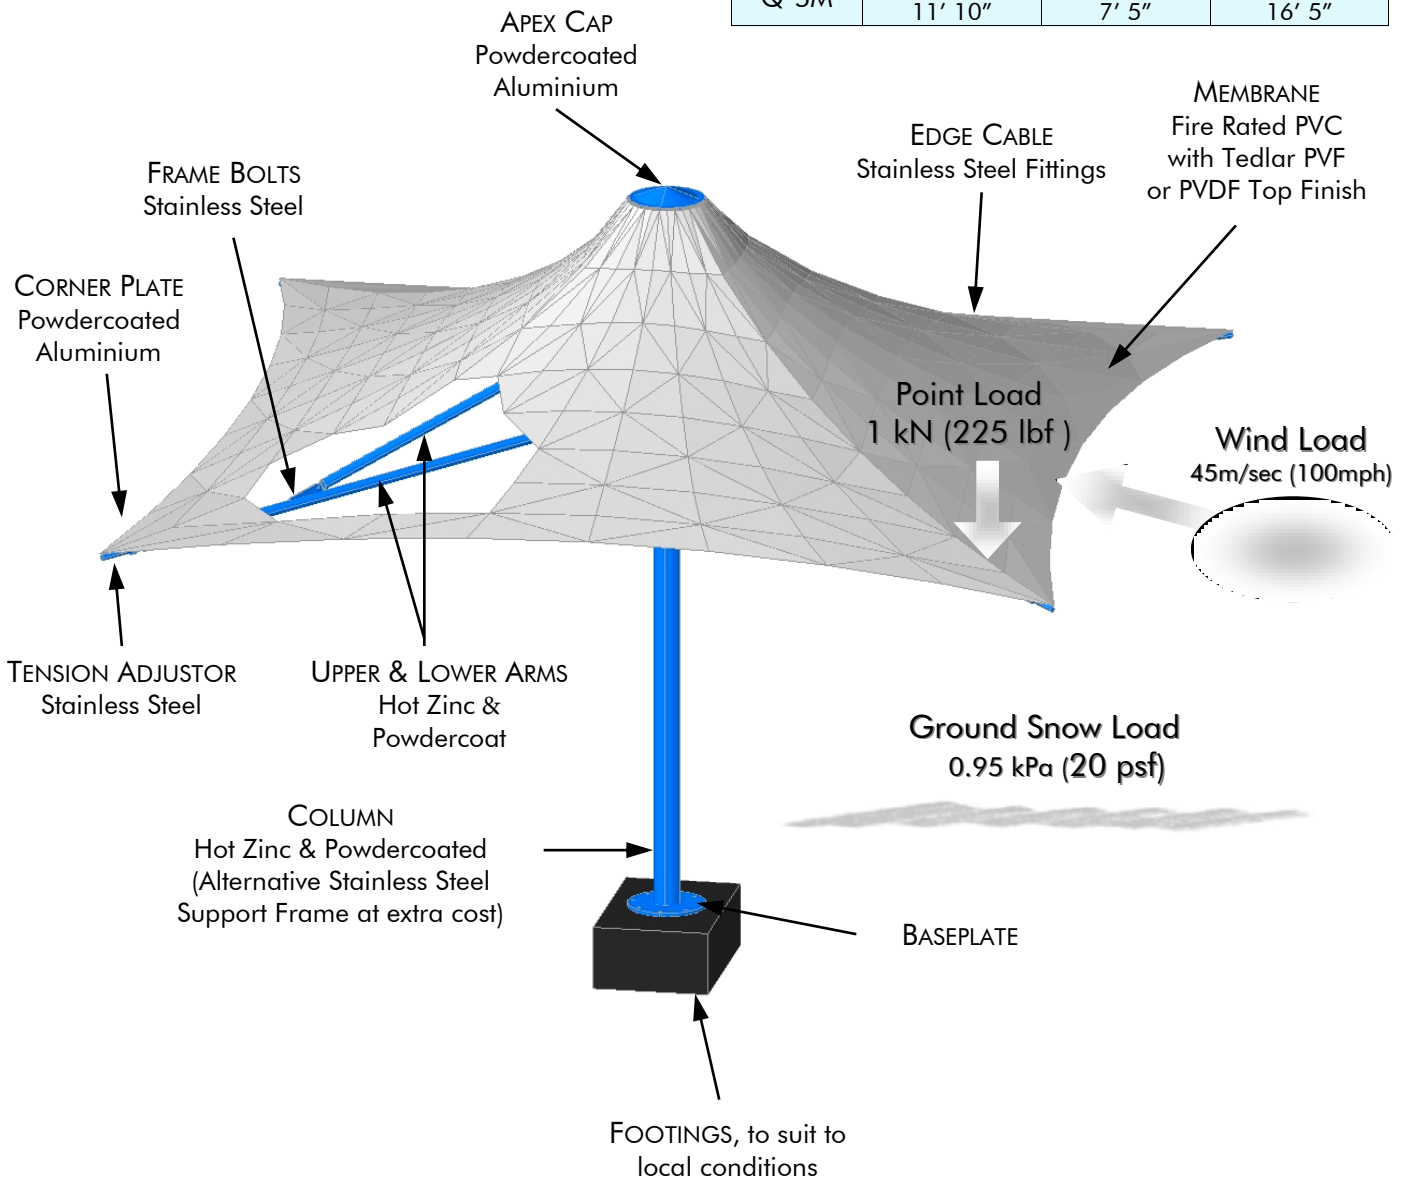

Flexshade® Quartet™ can be designed to suit specific customer requirements for height and plan dimension.